



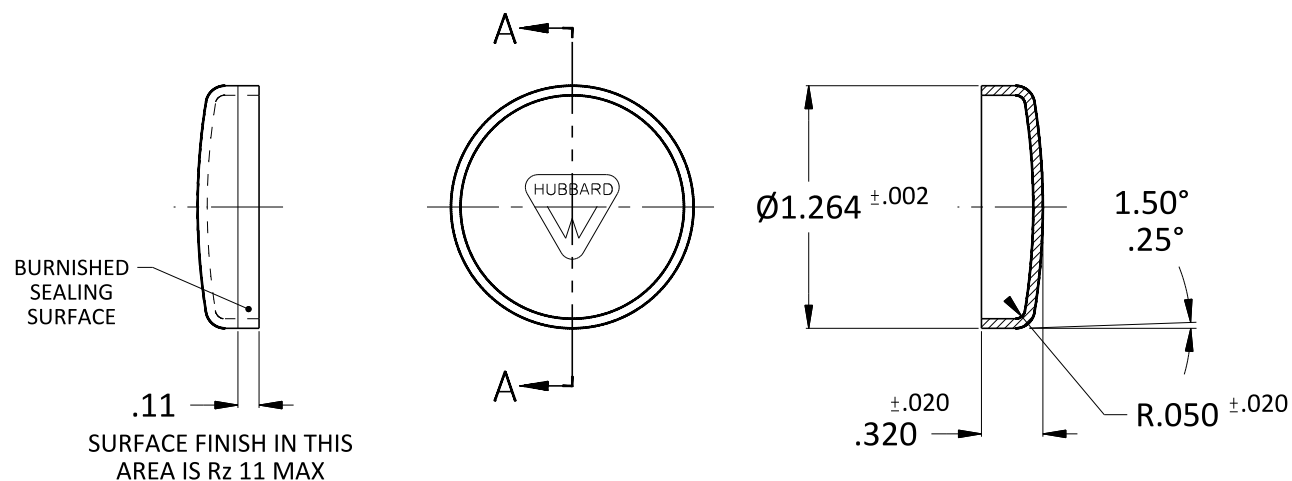

# INSTALLATION RECOMMENDATIONS NO SCALE

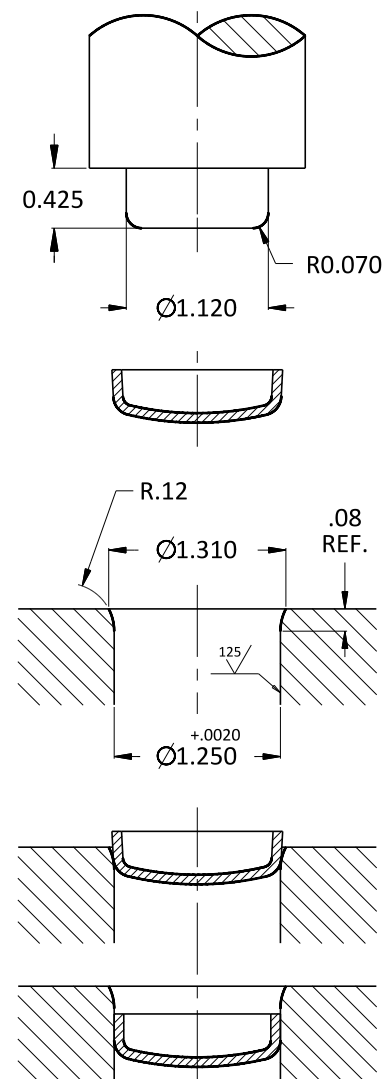


**M.D. Hubbard Spring Company**

Engineers and Manufacturers Since 1905  
<https://www.hubbardspring.com> OXFORD, MI - USA



DIAMETER MEASUREMENT:  
 Average of four equally spaced measurements

ROUNDNESS MEASUREMENT:  
 Maximum in diameter measurement must be less than .003

|                                                           |         |                          |                                                                                     |                    |                                                        |           |               |                                                                                          |
|-----------------------------------------------------------|---------|--------------------------|-------------------------------------------------------------------------------------|--------------------|--------------------------------------------------------|-----------|---------------|------------------------------------------------------------------------------------------|
| SCALE:                                                    | 1:1     | PROJECTION:              |  | MATERIAL TYPE      |                                                        | THICKNESS | PLAIN FINISH  | ELECTRO - PLATED ZINC<br>ASTM B633 SC1 type "V"<br>0.0002" Min.<br>(72 salt spray hours) |
| PRODUCT NAME:<br>CUP PLUG - ENGLISH<br>SPRING LOCK SERIES |         |                          |                                                                                     | STEEL              | ASTM A1008/A1008M<br>COLD ROLLED<br>CS TYPE "A" TEMPER | 0.050     | CP-1264-S-50  | CP-1264-S-50-EZ                                                                          |
| PART No.:                                                 | CP-1264 | DWG DATE:<br>JAN 1, 2026 |                                                                                     | STAINLESS<br>STEEL | ASTM A666 - 304<br>ANNEALED TEMPER                     | 0.050     | CP-1264-KS-50 |                                                                                          |