



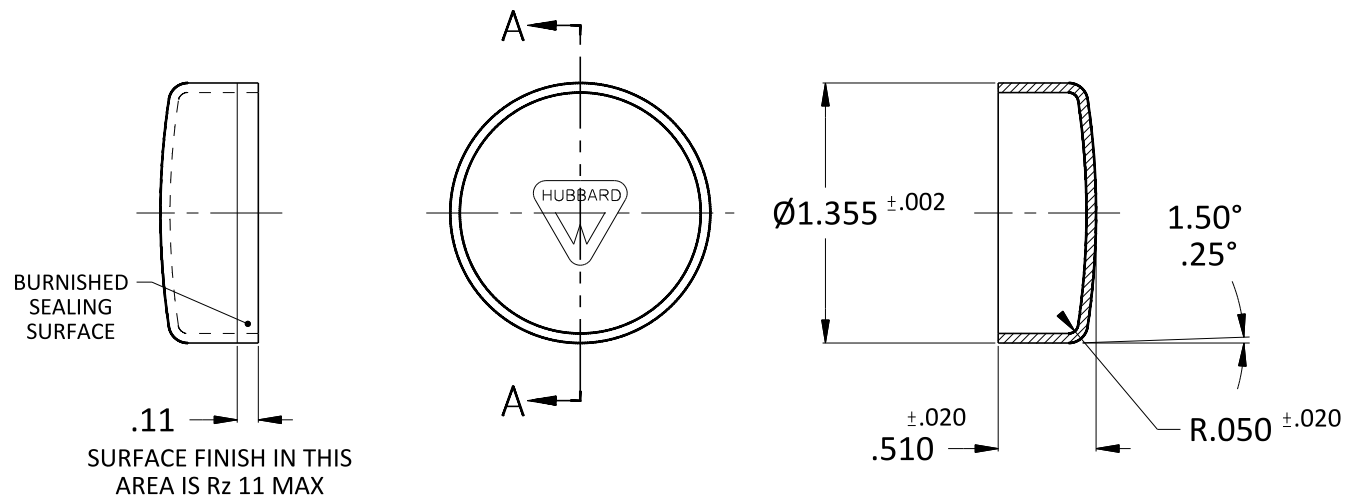

INSTALLATION RECOMMENDATIONS NO SCALE

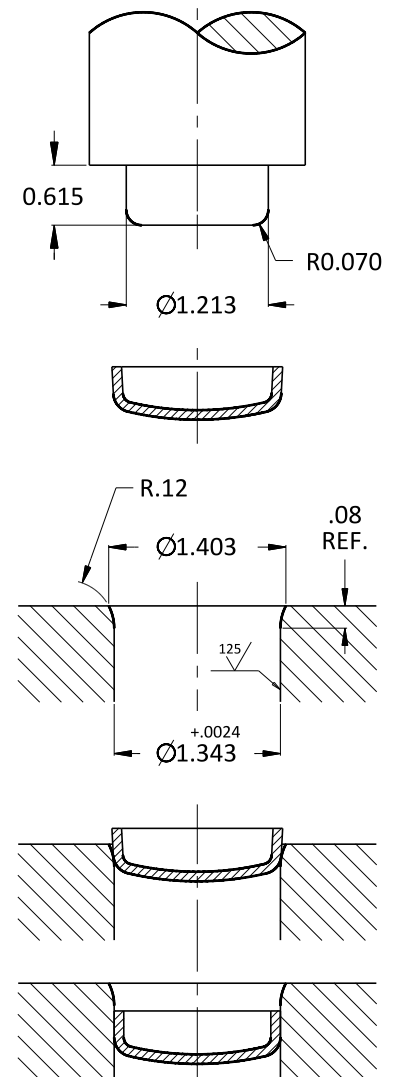


M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



DIAMETER MEASUREMENT:
 Average of four equally spaced measurements

ROUNDNESS MEASUREMENT:
 Maximum in diameter measurement must be less than $.003$

SCALE:	1:1	PROJECTION:		MATERIAL TYPE		THICKNESS	PLAIN FINISH	ELECTRO - PLATED ZINC ASTM B633 SC1 type "V" 0.0002" Min. (72 salt spray hours)
PRODUCT NAME:	CUP PLUG - ENGLISH SPRING LOCK SERIES			STEEL	ASTM A1008/A1008M COLD ROLLED CS TYPE "A" TEMPER	0.050	CP-1355-S-50	CP-1355-S-50-EZ
PART No.:	CP-1355	DWG DATE:	JAN 1, 2026	STAINLESS STEEL	ASTM A666 - 304 ANNEALED TEMPER	0.050	CP-1355-KS-50	