



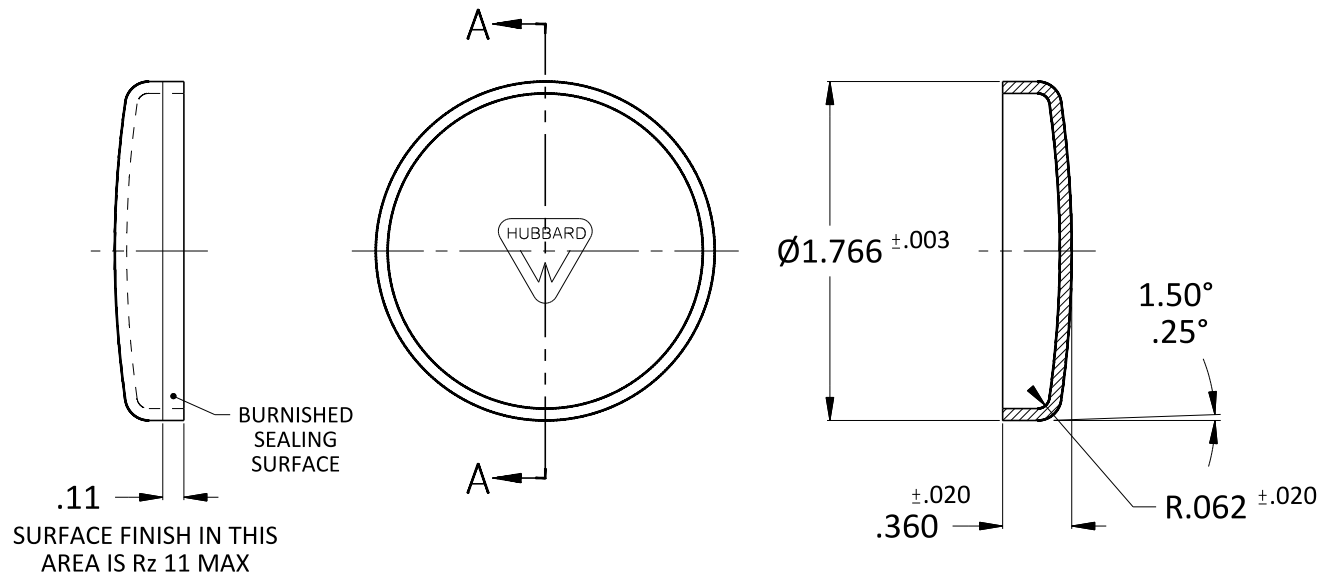

INSTALLATION RECOMMENDATIONS NO SCALE

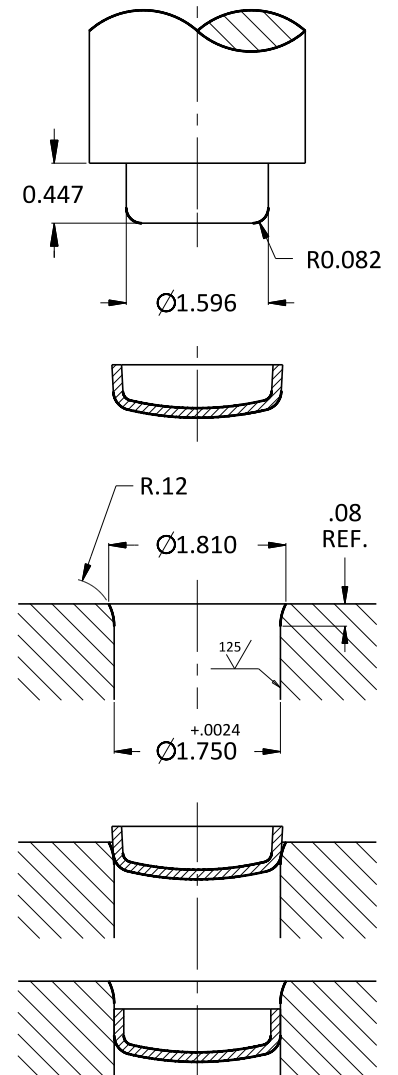

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



DIAMETER MEASUREMENT:
 Average of four equally spaced measurements

ROUNDNESS MEASUREMENT:
 Maximum minus minimum diameter measurement must be less than $.003$

SCALE:	1:1	PROJECTION:		MATERIAL TYPE		THICKNESS	PLAIN FINISH	ELECTRO - PLATED ZINC ASTM B633 SC1 type "V" 0.0002" Min. (72 salt spray hours)
PRODUCT NAME: CUP PLUG - ENGLISH SPRING LOCK SERIES				STEEL	ASTM A1008/A1008M COLD ROLLED CS TYPE "A" TEMPER	0.062	CP-1766-S-62	CP-1766-S-62-EZ
PART No.: CP-1766		DWG DATE: JAN 1, 2026		STAINLESS STEEL	ASTM A666 - 304 ANNEALED TEMPER	0.062	CP-1766-KS-62	