



# INSTALLATION RECOMMENDATIONS NO SCALE

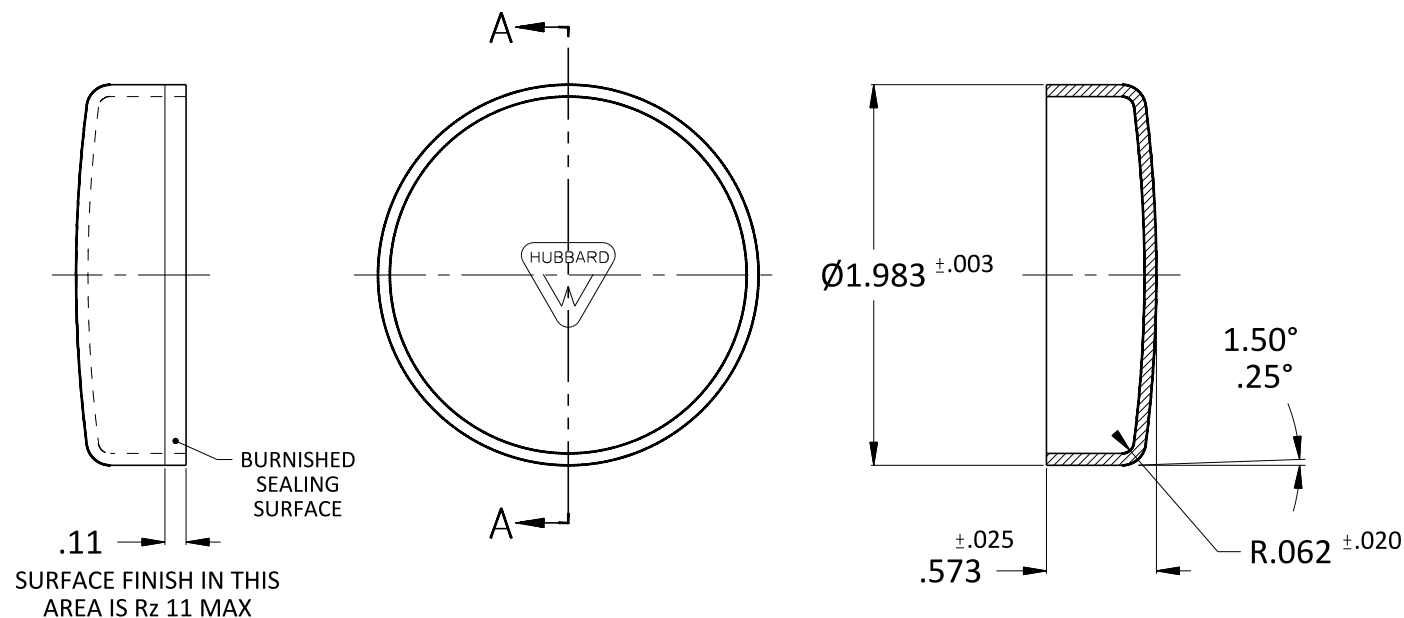

## M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905  
<https://www.hubbardspring.com> OXFORD, MI - USA

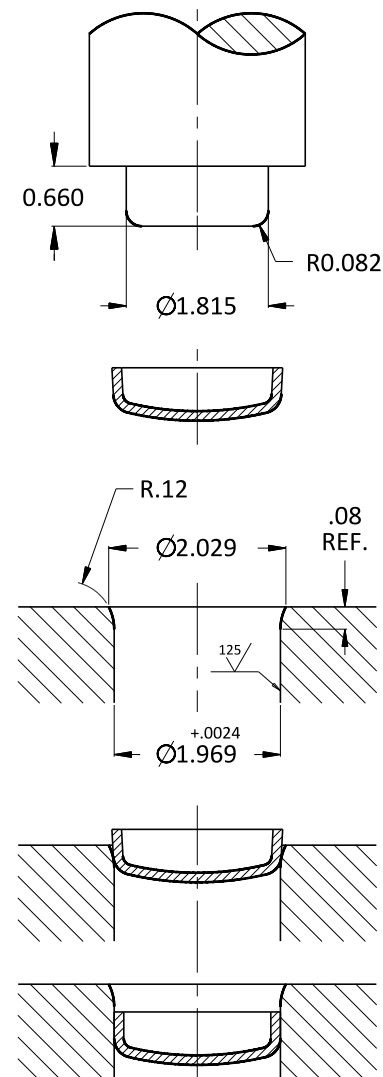

DIAMETER MEASUREMENT:  
Average of four equally spaced measurements

ROUNDNESS MEASUREMENT:  
Maximum in diameter measurement must be  
less than .003

|               |                                          |             |                                                                                     |                    |                                                        |           |               |                                                                                          |
|---------------|------------------------------------------|-------------|-------------------------------------------------------------------------------------|--------------------|--------------------------------------------------------|-----------|---------------|------------------------------------------------------------------------------------------|
| SCALE:        | 1:1                                      | PROJECTION: |  | MATERIAL TYPE      |                                                        | THICKNESS | PLAIN FINISH  | ELECTRO - PLATED ZINC<br>ASTM B633 SC1 type "V"<br>0.0002" Min.<br>(72 salt spray hours) |
| PRODUCT NAME: | CUP PLUG - ENGLISH<br>SPRING LOCK SERIES |             |                                                                                     | STEEL              | ASTM A1008/A1008M<br>COLD ROLLED<br>CS TYPE "A" TEMPER | 0.062     | CP-1983-S-62  | CP-1983-S-62-EZ                                                                          |
| PART No.:     | CP-1983                                  | DWG DATE:   | JAN 1, 2026                                                                         | STAINLESS<br>STEEL | ASTM A666 - 304<br>ANNEALED TEMPER                     | 0.062     | CP-1983-KS-62 |                                                                                          |