



BURNISHED
SEALING
SURFACE

.04

SURFACE FINISH IN THIS
AREA IS Rz 11 MAX

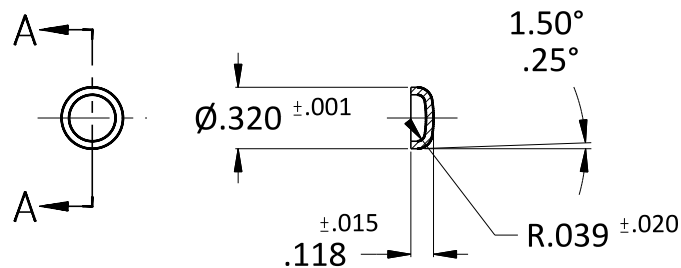

INSTALLATION RECOMMENDATIONS NO SCALE

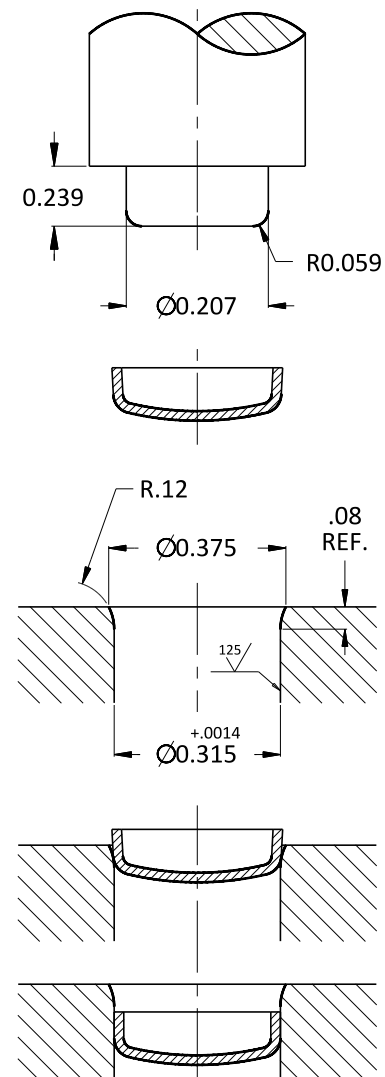

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



DIAMETER MEASUREMENT:
Average of four equally spaced measurements

ROUNDNESS MEASUREMENT:
Maximum in diameter measurement must be
less than .003

SCALE:	1:1	PROJECTION:		MATERIAL TYPE		THICKNESS	PLAIN FINISH	ELECTRO - PLATED ZINC ASTM B633 SC1 type "V" 0.0002" Min. (72 salt spray hours)
PRODUCT NAME:	CUP PLUG - ENGLISH SPRING LOCK SERIES			STEEL	ASTM A1008/A1008M COLD ROLLED CS TYPE "A" TEMPER	0.039	CP-320-S-39	CP-320-S-39-EZ
PART No.:				CP-320	DWG DATE:	JAN 1, 2026	STAINLESS STEEL	ASTM A666 - 304 ANNEALED TEMPER