



BURNISHED
SEALING
SURFACE

.04

SURFACE FINISH IN THIS
AREA IS Rz 11 MAX

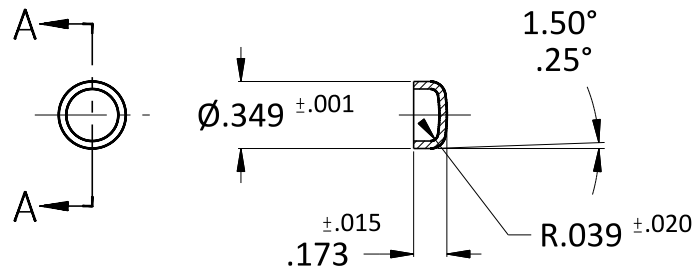

INSTALLATION RECOMMENDATIONS NO SCALE

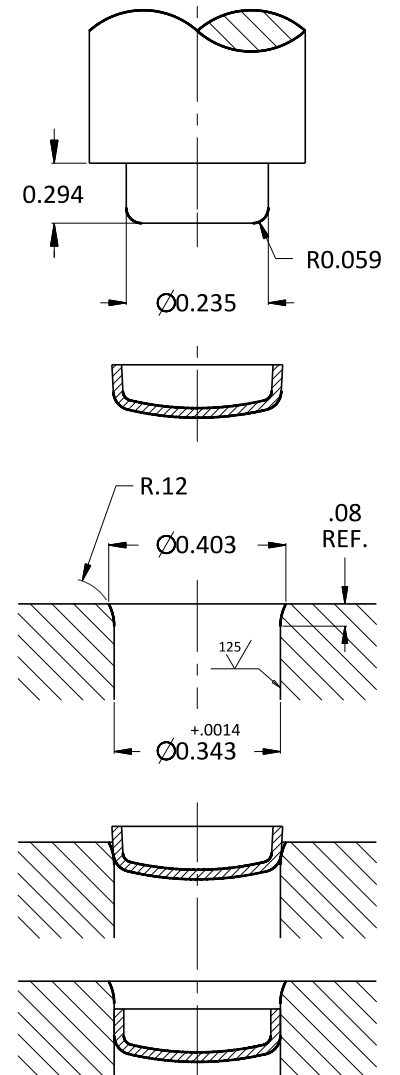

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



DIAMETER MEASUREMENT:
Average of four equally spaced measurements

ROUNDNESS MEASUREMENT:
Maximum in diameter measurement must be
less than .003

SCALE: 1:1		PROJECTION: 		MATERIAL TYPE		THICKNESS	PLAIN FINISH	ELECTRO - PLATED ZINC ASTM B633 SC1 type "V" 0.0002" Min. (72 salt spray hours)
PRODUCT NAME: CUP PLUG - ENGLISH SPRING LOCK SERIES				STEEL	ASTM A1008/A1008M COLD ROLLED CS TYPE "A" TEMPER	0.039	CP-349-S-39	CP-349-S-39-EZ
				STAINLESS STEEL	ASTM A666 - 304 ANNEALED TEMPER	0.039	CP-349-KS-39	
PART No.: CP-349		DWG DATE: JAN 1, 2026						