


+0.010 [0.25]
-0.000
Ø1.362 [34.59]

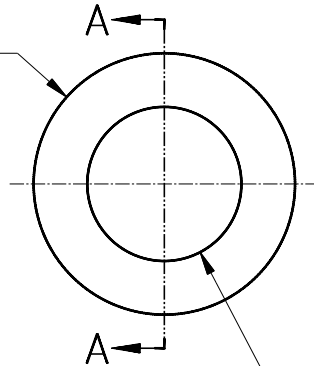


+0.000
-0.008 [0.21]
Ø.803 [20.4]


Ø.882 [22.4]

0.047 [1.20] .020 THICK MAT'L


0.043 [1.09] FREE HEIGHT REFERENCE
.016 THICK MAT'L



1.378 [35.00]
BEARING
DIAMETER




0.022 [0.56]
LOADED
HEIGHT



.016
THICK
MAT'L

SPRING FORCE
12.95 - 17.50 Lb
57.6 - 77.8 N

0.026 [0.67]
LOADED
HEIGHT



.020
THICK
MAT'L

SPRING FORCE
24.97 - 33.70 Lb
111.1 - 149.9 N

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, M.I. - USA



SCALE: 1:1



PRODUCT NAME: DISC SPRING WASHER - ENGLISH [MM]
LOAD RATED

PART No.: DSW-1362

DWG DATE: JAN 1, 2026

MATERIAL

THICKNESS

FINISH
Vibroground - Light Oil

HIGH CARBON STEEL

ASTM A684/684M - 1074
AUSTEMPERED RC44-47

0.016 [0.41]
0.020 [0.51]

DSW-1362-S-16
DSW-1362-S-20