




+0.010 [0.25]
-0.000
Ø1.600 [40.64]

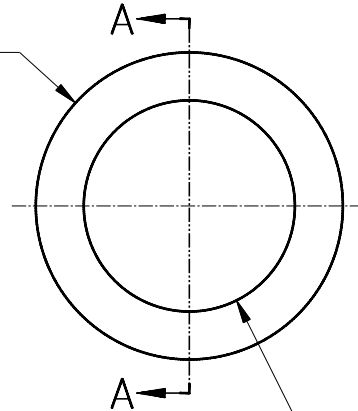


0.055 [1.40]
FREE HEIGHT
REFERENCE

+0.000
-0.008 [0.21]
Ø1.100 [27.94]



1.625 [41.27]
BEARING
DIAMETER

0.029 [0.74]
LOADED
HEIGHT

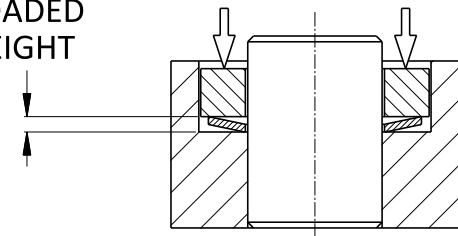

SPRING FORCE
24.05 - 32.50 Lb
107.0 - 144.6 N

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MA - USA



SCALE:
1:1



PRODUCT
NAME: **DISC SPRING WASHER - ENGLISH [MM]
LOAD RATED**

PART NO.: **DSW-1600**

DWG DATE: **JAN 1, 2026**

MATERIAL

THICKNESS

FINISH
Vibroground - Light Oil

HIGH CARBON STEEL

ASTM A684/684M - 1074
AUSTEMPERED RC44-47

0.020 [0.51]

DSW-1600-S-20