




+0.010 [0.25]
-0.000
Ø1.638 [41.61]

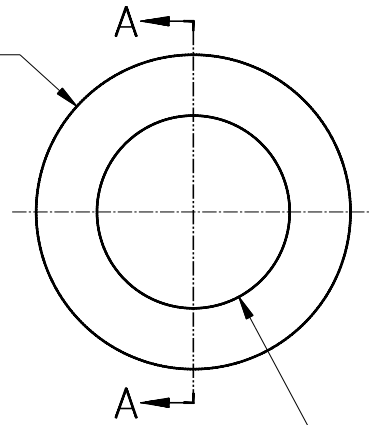

0.055 [1.40]
FREE HEIGHT
REFERENCE




+0.000
-0.008 [0.21]
Ø1.004 [25.5]



1.654 [42.01]
BEARING
DIAMETER

0.028 [0.71]
LOADED
HEIGHT



SPRING FORCE
23.12 - 31.20 Lb
102.8 - 138.8 N

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE: **1:1** PROJECTION:

PRODUCT NAME: **DISC SPRING WASHER - ENGLISH [MM]
LOAD RATED**

PART NO.: **DSW-1638** DWG DATE: **JAN 1, 2026**

MATERIAL: **HIGH CARBON STEEL**
ASTM A684/684M - 1074
AUSTEMPERED RC44-47

THICKNESS: **0.020 [0.51]**

FINISH: **Vibroground - Light Oil**
DSW-1638-S-20