



+0.012 [0.30]
-0.000
Ø1.970 [50.04]


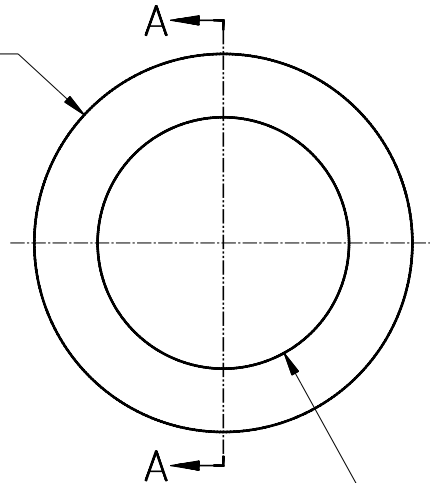


+0.000
-0.010 [0.25]
Ø1.310 [33.27]

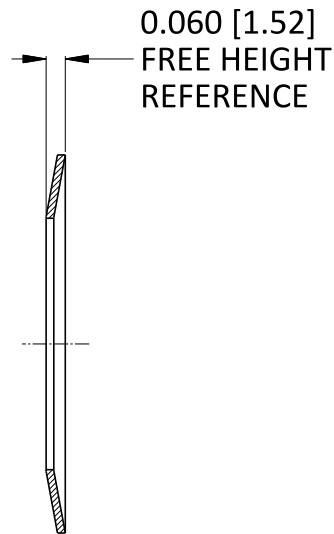

0.060 [1.52]
FREE HEIGHT
REFERENCE

0.034 [0.86]
LOADED
HEIGHT

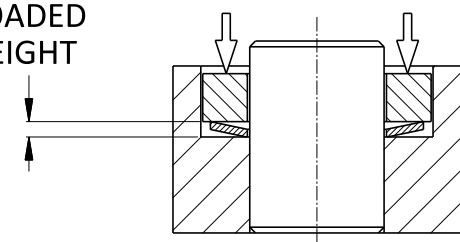

2.000 [50.80]
BEARING
DIAMETER

SPRING FORCE
26.82 - 36.20 Lb
119.3 - 161.0 N

M.D. Hubbard Spring Company


Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MA - USA



SCALE:

1:1

PROJECTION:



PRODUCT
NAME:

DISC SPRING WASHER - ENGLISH [MM]
LOAD RATED

PART NO.:

DSW-1970

DWG DATE:

JAN 1, 2026

MATERIAL

HIGH CARBON STEEL

ASTM A684/684M - 1074
AUSTEMPERED RC44-47

THICKNESS

0.025 [0.64]

FINISH
Vibroground - Light Oil

DSW-1970-S-25