



+0.012 [0.30]
-0.000
Ø2.216 [56.29]

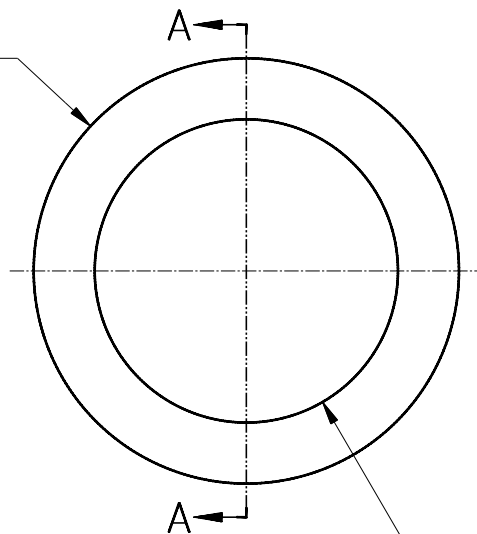


0.065 [1.65]
FREE HEIGHT
REFERENCE




+0.000
-0.010 [0.25]
Ø1.580 [40.13]

2.250 [57.15]
BEARING
DIAMETER



0.035 [0.89]
LOADED
HEIGHT

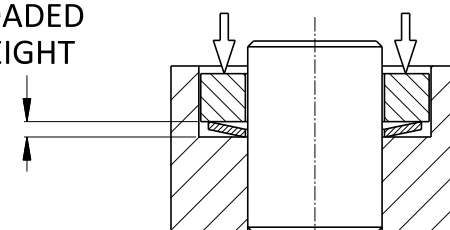

SPRING FORCE
29.60 - 40.00 Lb
131.7 - 177.9 N

M.D. Hubbard Spring Company


Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE:

1:1

PROJECTION:



PRODUCT
NAME:

DISC SPRING WASHER - ENGLISH [MM]
LOAD RATED

PART NO.:

DSW-2216

DWG DATE:

JAN 1, 2026

MATERIAL

HIGH CARBON STEEL

THICKNESS

0.025 [0.64]

FINISH
Vibroground - Light Oil

ASTM A684/684M - 1074
AUSTEMPERED RC44-47

DSW-2216-S-25