

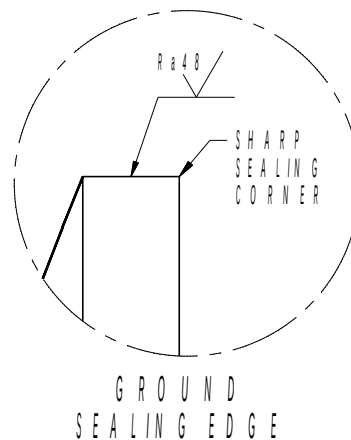


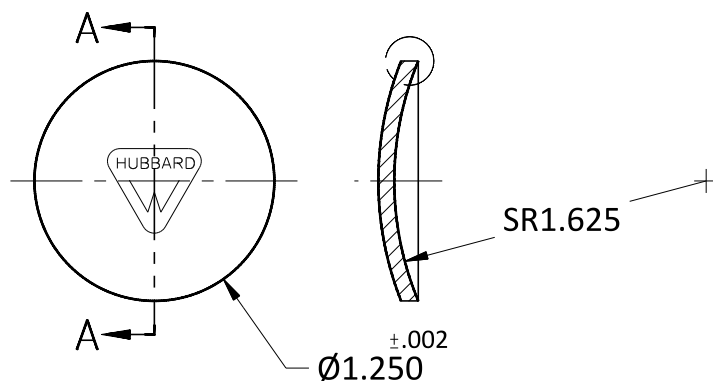

INSTALLATION RECOMMENDATIONS NO SCALE

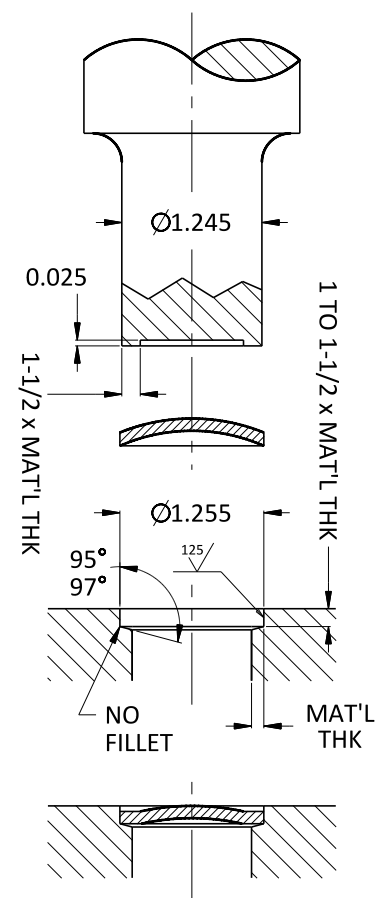

M.D. Hubbard Spring Company


Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, M.I. - USA



SCALE:

1:1

PROJECTION:



PRODUCT
NAME:

**WELCH PLUG
GROUND EDGE - ENGLISH**

PART No.:

HPG-1250

DWG DATE:

JAN 1, 2026

	MATERIAL	THICKNESS	PLAIN FINISH	ELECTRO- PLATED ZINC	MECHANICAL- PLATED ZINC
ALUMINUM	ASTM B209 - 1100 H14 TEMPER	0.064 0.081	HPG-1250-A-64 HPG-1250-A-81	ASTM B633 SC1 type "V" 0.0002" M in. (72 salt spray hours)	ASTM B695 0.00015" M in. (30 salt spray hours)
BRASS	ASTM B36/B36M - C26000 H02 TEMPER (halfhard)	0.064 0.081	HPG-1250-B-64 HPG-1250-B-81		
STEEL	SAE J403 - 1008/1010 COLD ROLLED - ASTM A109 No. 2 TEMPER (halfhard)				
	SAE J403 - 1008/1010 HOT ROLLED "AS ROLLED" TEMPER	0.062 0.083	HPG-1250-S-62 HPG-1250-S-83	HPG-1250-S-62-EZ HPG-1250-S-83-EZ	HPG-1250-S-62-MZ HPG-1250-S-83-MZ
STAINLESS STEEL	ASTM A666 - 304 ANNEALED TEMPER	0.062 0.083	HPG-1250-KS-62 HPG-1250-KS-83		