



+0.020 [0.51]
-0.040 [1.02]
Ø1.621 [41.17]



0.112 [2.84]
FREE HEIGHT
REFERENCE

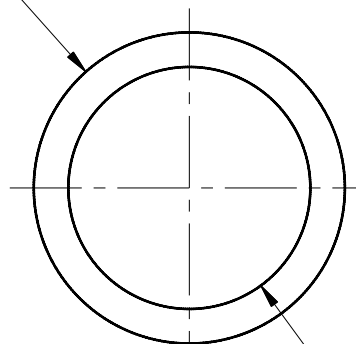


+0.020 [0.51]
-0.030 [0.76]
Ø1.261 [32.03]



1.654 [42]
BEARING
DIAMETER

0.056 [1.42]
LOADED
HEIGHT



SPRING FORCE
20.00 - 31.00 Lb
89.0 - 138.0 N



3 WAVES
EQUALLY SPACED

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE:
1:1

PROJECTION:

PRODUCT
NAME: **WAVE SPRING WASHER - ENGLISH [MM]
LOAD RATED**

PART No.: **WSW-1621**

DWG DATE:
JAN 1, 2026

MATERIAL

THICKNESS

FINISH
Vibroground-Light Oil

STAINLESS STEEL

ASTM A666 - 304
Full Hard - Stress Relieved

0.020 [0.51]

WSW-1621-KS-20