

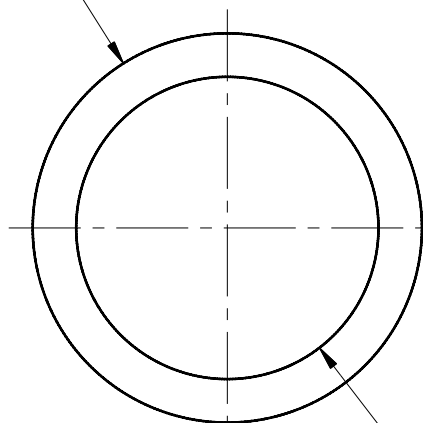


+0.020 [0.51]
-0.050 [1.27]
Ø2.028 [51.51]




0.140 [3.56]
FREE HEIGHT
REFERENCE

+0.020 [0.51]
-0.040 [1.02]
Ø1.575 [40.01]



2.047 [52]
BEARING
DIAMETER

0.069 [1.75]
LOADED
HEIGHT



SPRING FORCE
28.00 - 44.00 Lb
125.0 - 196.0 N



3 WAVES
EQUALLY SPACED

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE: 1:1



PRODUCT NAME: WAVE SPRING WASHER - ENGLISH [MM]
LOAD RATED

PART No.: WSW-2028

DWG DATE: JAN 1, 2026

MATERIAL		THICKNESS	FINISH Vibroground-Light Oil
STAINLESS STEEL	ASTM A666 - 304 Full Hard - Stress Relieved	0.023 [0.58]	WSW-2028-KS-23