



+0.020 [0.51]
-0.050 [1.27]
Ø2.132 [54.15]

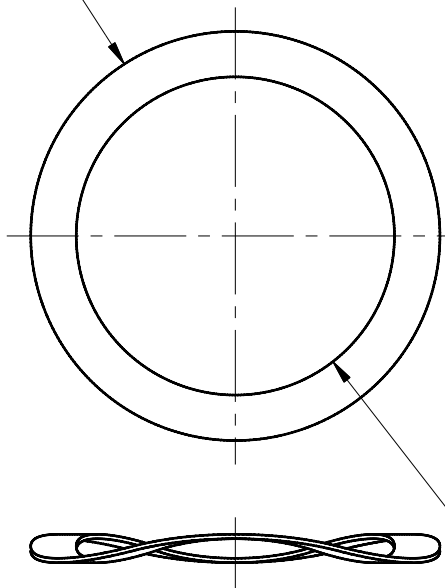


0.148 [3.76]
FREE HEIGHT
REFERENCE

+0.020 [0.51]
-0.040 [1.02]
Ø1.658 [42.11]



2.165 [55]
BEARING
DIAMETER

0.073 [1.85]
LOADED
HEIGHT



SPRING FORCE
30.00 - 47.00 Lb
133.0 - 209.0 N

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE: 1:1



PRODUCT NAME: WAVE SPRING WASHER - ENGLISH [MM]
LOAD RATED

PART No.: WSW-2132

DWG DATE: JAN 1, 2026



3 WAVES
EQUALLY SPACED

MATERIAL

THICKNESS

FINISH
Vibroground-Light Oil

STAINLESS STEEL

ASTM A666 - 304
Full Hard - Stress Relieved

0.023 [0.58]

WSW-2132-KS-23