



+0.020 [0.51]
-0.050 [1.27]
Ø2.420 [61.47]

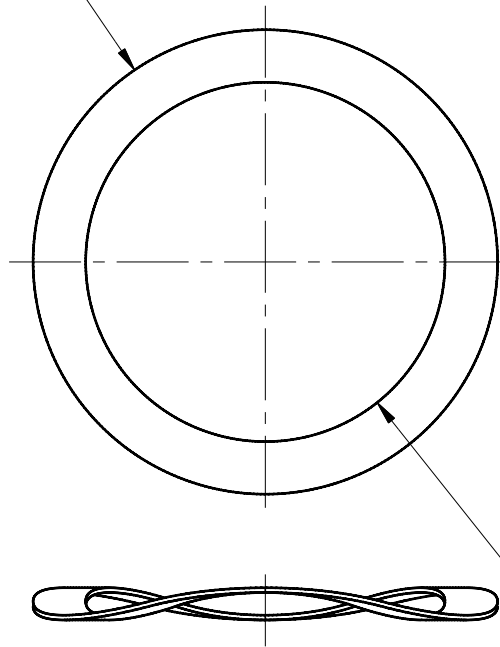


0.168 [4.27]
FREE HEIGHT
REFERENCE

+0.020 [0.51]
-0.040 [1.02]
Ø1.872 [47.55]

2.441 [62]
BEARING
DIAMETER



0.082 [2.08]
LOADED
HEIGHT



SPRING FORCE
36.00 - 56.00 Lb
160.0 - 249.0 N

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE:
1:1

PROJECTION:

PRODUCT
NAME: **WAVE SPRING WASHER - ENGLISH [MM]
LOAD RATED**

PART No.: **WSW-2420**

DWG DATE:
JAN 1, 2026

MATERIAL

THICKNESS

FINISH
Vibroground-Light Oil

STAINLESS STEEL

ASTM A666 - 304
Full Hard - Stress Relieved

0.025 [0.64]

WSW-2420-KS-25



**3 WAVES
EQUALLY SPACED**