


+0.020 [0.51]
-0.050 [1.27]
Ø2.816 [71.53]




0.197 [5.00]
FREE HEIGHT
REFERENCE

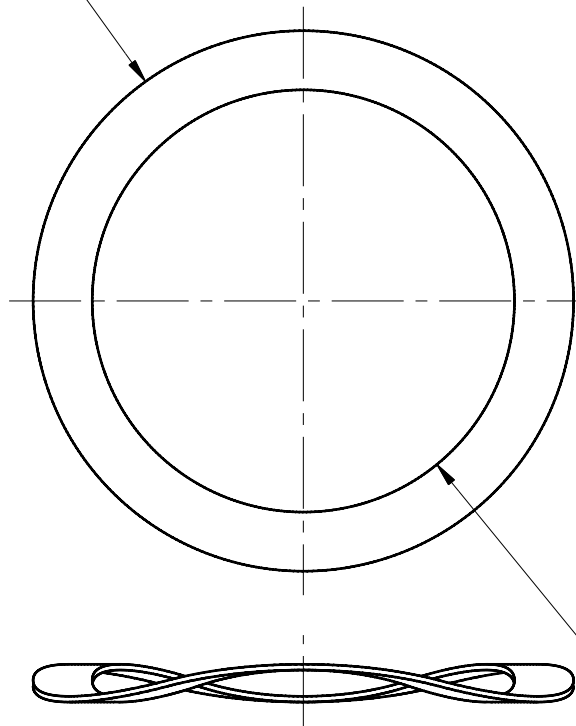


+0.020 [0.51]
-0.050 [1.27]
Ø2.200 [55.88]

2.835 [72]
BEARING
DIAMETER



0.097 [2.46]
LOADED
HEIGHT

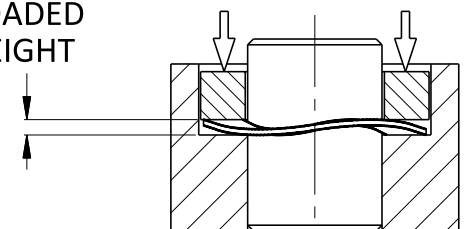

SPRING FORCE
52.00 - 81.00 Lb
231.0 - 360.0 N

M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE: 1:1



PRODUCT NAME: WAVE SPRING WASHER - ENGLISH [MM]
LOAD RATED

PART No.: WSW-2816

DWG DATE: JAN 1, 2026



3 WAVES
EQUALLY SPACED

MATERIAL

THICKNESS

FINISH
Vibroground-Light Oil

STAINLESS STEEL

ASTM A666 - 304
Full Hard - Stress Relieved

0.030 [0.76]

WSW-2816-KS-30