

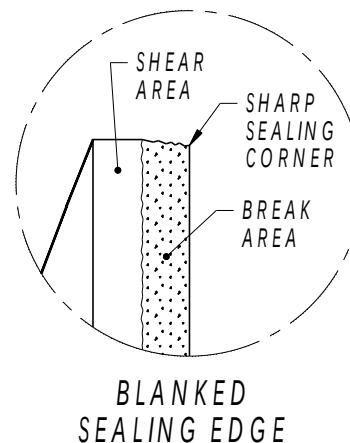


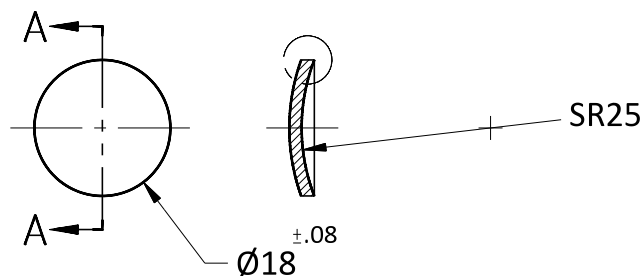

INSTALLATION RECOMMENDATIONS NO SCALE

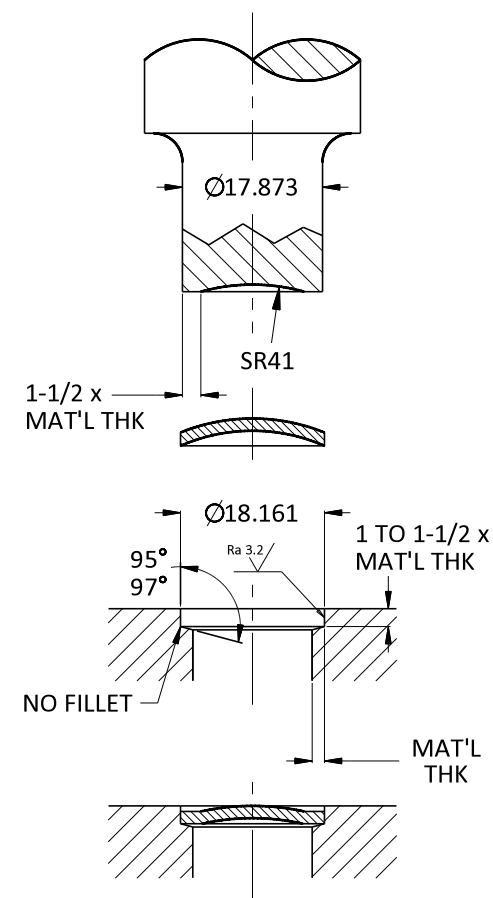


M.D. Hubbard Spring Company

Engineers and Manufacturers Since 1905
<https://www.hubbardspring.com> OXFORD, MI - USA



SCALE: 1:1



PRODUCT NAME: **WELCH PLUG (DIN 470)
BLANKED EDGE - METRIC**

PART No.: **HPM-709**

DWG DATE: **JAN 1, 2026**

	MATERIAL	THK	PLAIN FINISH	ELECTRO - PLATED ZINC	MECHANICAL - PLATED ZINC
ALUMINUM	ASTM B209 - 1100 H14 TEMPER	0.81 1.63 2.00	HPM-709-A-32 HPM-709-A-64 HPM-709-A-81	ASTM B633 SC1 type "V" 0.0002" Min. (72 salt spray hours)	ASTM B695 0.00015" Min. (30 salt spray hours)
BRASS	ASTM B36/B36M - C26000 H02 TEMPER (half hard)	0.81 1.63 2.00	HPM-709-B-32 HPM-709-B-64 HPM-709-B-81		
STEEL	SAE J403 - 1008/1010 COLD ROLLED - ASTM A109 No. 2 TEMPER (half hard)	0.81 1.00	HPM-709-S-32 HPM-709-S-39	HPM-709-S-32-EZ HPM-709-S-39-EZ	HPM-709-S-32-MZ HPM-709-S-39-MZ
	SAE J403 - 1008/1010 HOT ROLLED "AS ROLLED" TEMPER	1.57	HPM-709-S-62	HPM-709-S-62-EZ	HPM-709-S-62-MZ
STAINLESS STEEL	ASTM A666 - 304 ANNEALED TEMPER	0.81 1.57	HPM-709-KS-32 HPM-709-KS-62		